

INTRODUCING...

2V DIE RAILS FROM WILSON TOOL

HARDENED DIE RAIL


The ultimate in precision; when using the quick change 2V die with this die rail, the dies are being loaded and unloaded constantly. This puts a heavy demand on the die rail and it gets a lot of marks therefore not allowing the die to sit flat.

The hardened rail maintains the accuracy ensuring quality parts every time. When you turn the die you do not have to re-align the machine to get the punch and die to match.

NON-HARDENED DIE RAIL

This is generally what is supplied in the industry, which can be of use on machines where the number of tool changes is low. However, if you use these in situations where tools are changed often, accuracy will be lost.

BENEFIT	HARD	NOT HARD
Machined to +/- 0,02mm on working dimensions	✓	✓
Manufactured from quality tool steel	✓	✗
Through hardened	✓	✗
Suitable where there are many tool changes	✓	✗
Suitable where there is a low number of tool changes	✓	✓
Rail stocked	✓	✓

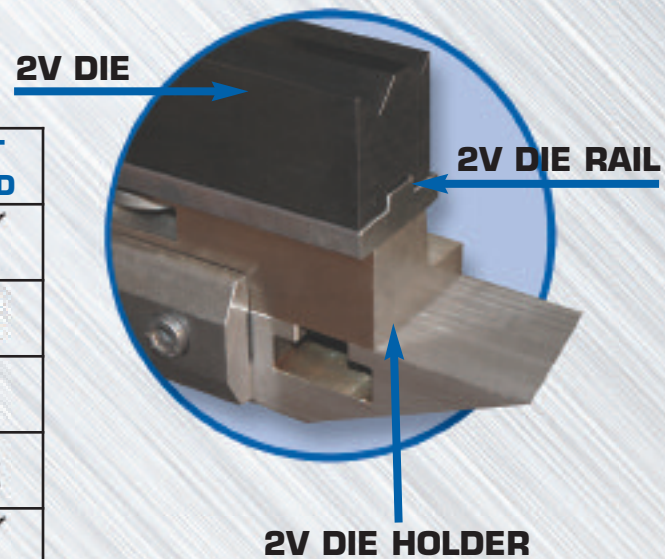

P/N	DESCRIPTION	PRICE	P/N	DESCRIPTION	PRICE
42090L	Hardened 2V die rail-long		42089L	2V die rail-long	
42090S	Hardened 2V die rail-short		42089S	2V die rail-short	

For advice and further information on any products contact Wilson Tool direct on:
0800 012 1475 (freephone) 1-800 70 90 09 (freephone Eire) or alternatively e-mail
pbsales@wilsontool.eu.com

Wilson Tool International (Europe) Ltd. Stirling Road, South Marston Industrial Estate, Swindon, Wiltshire SN3 4TQ

Free phone: 0800 012 1475 Tel: +44 (0) 1793 831818 Tel free: 1-800 70 90 09 Ireland

Free fax: 0800 012 1476 Fax: +44 (0) 1793 831945 Fax free: 1-800 53 55 38 Ireland

www.wilsontool.com pbsales@wilsontool.eu.com